
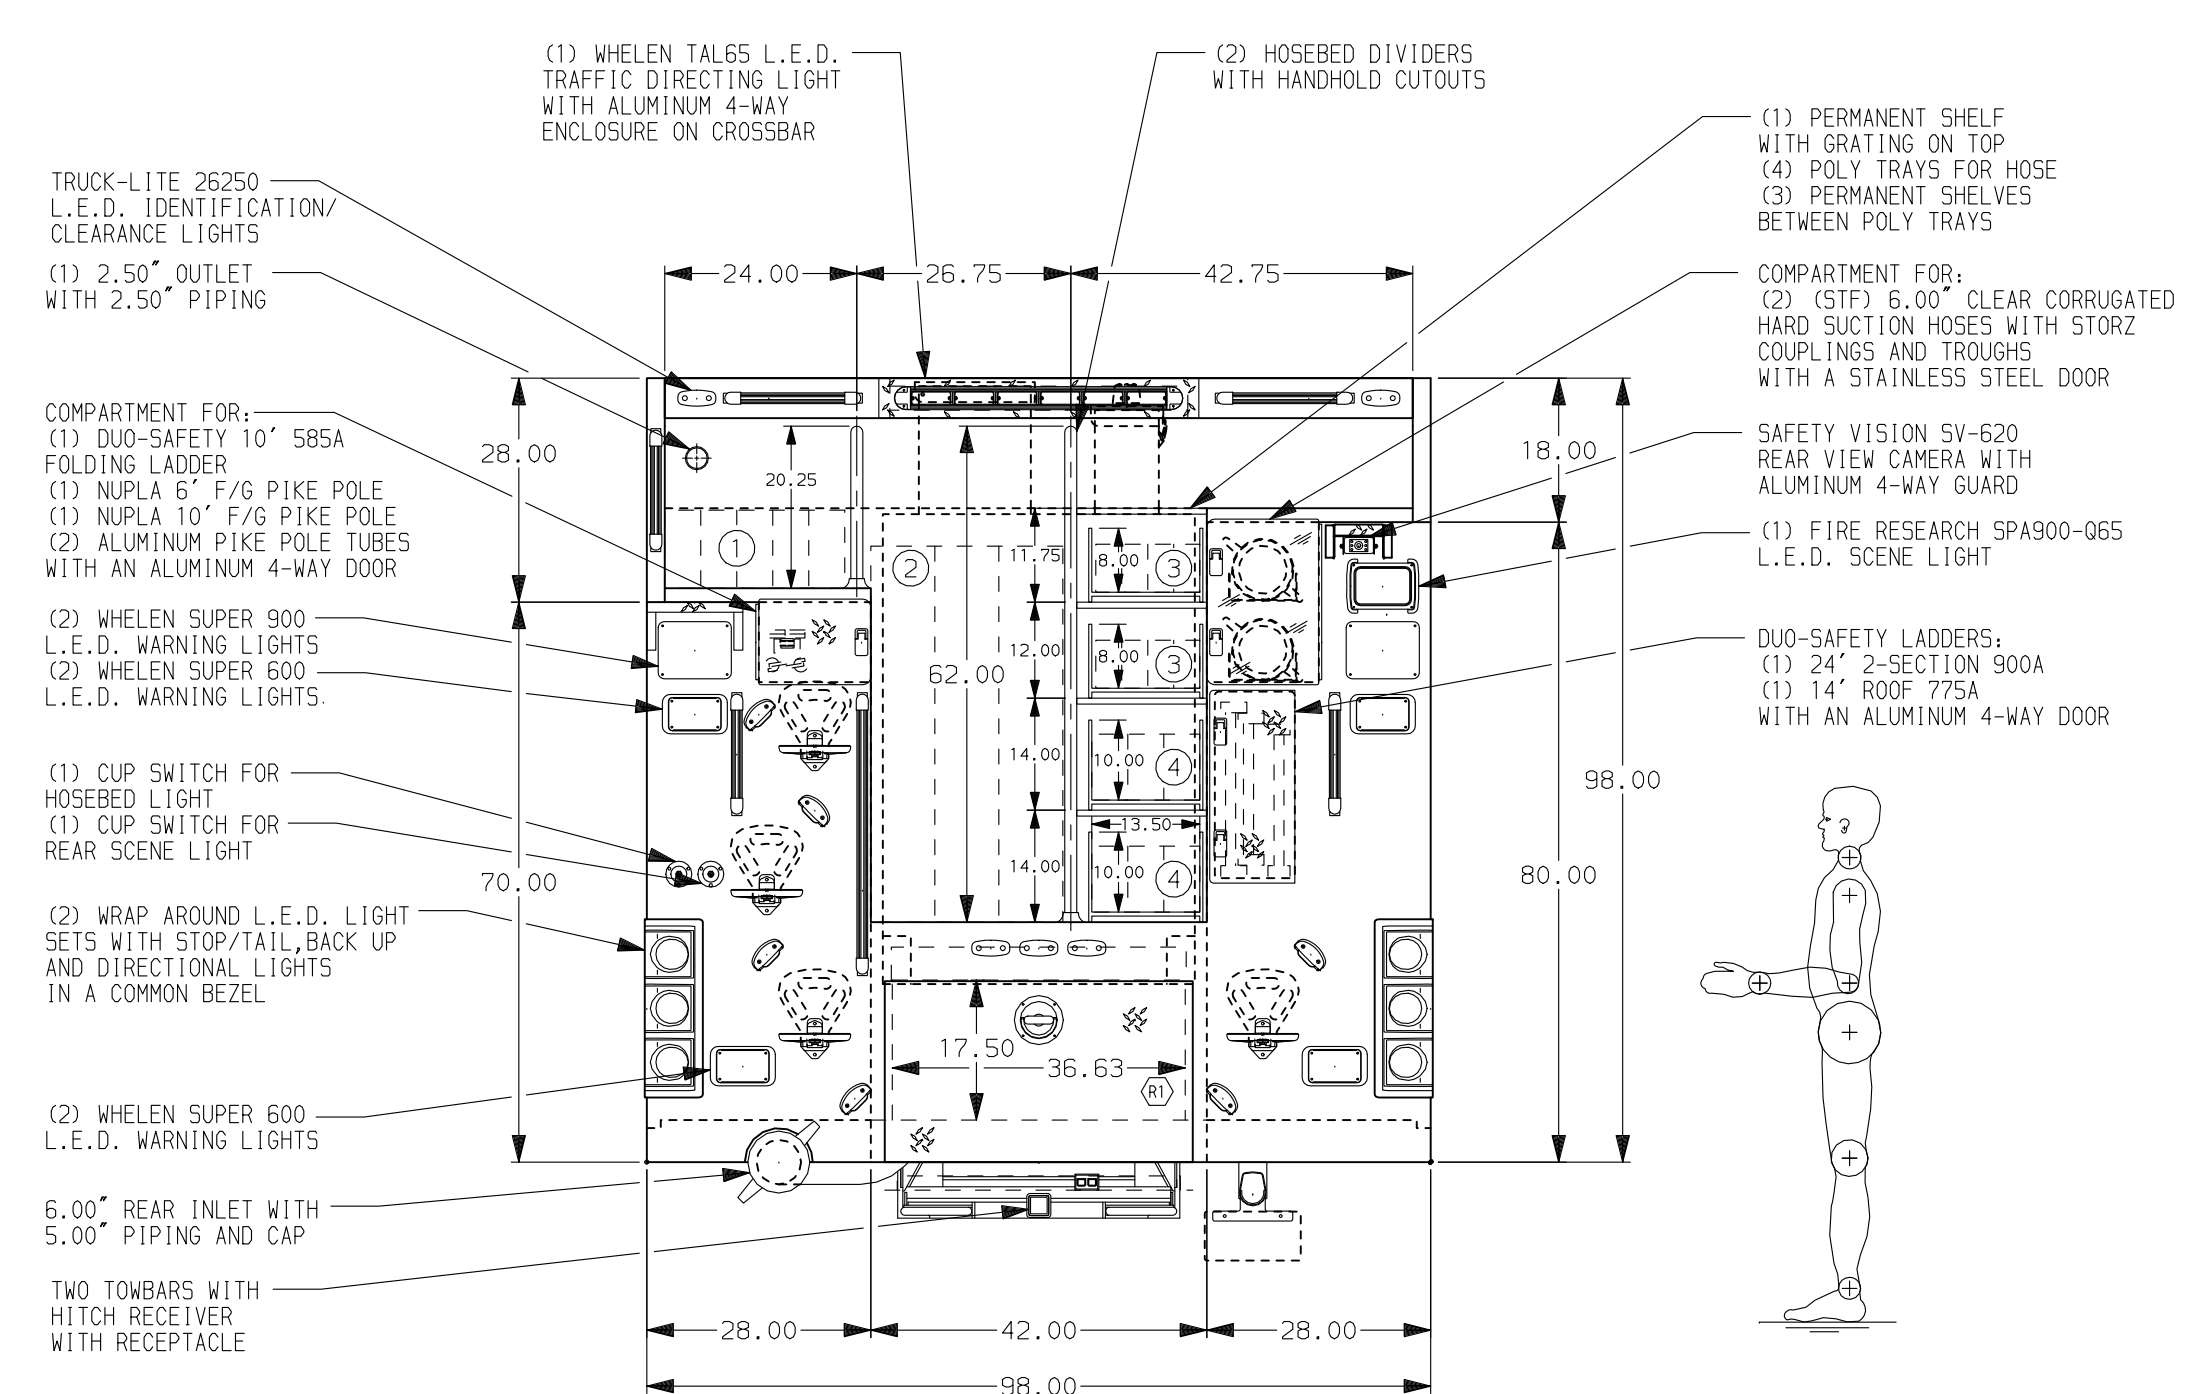


- HOSEBED CAPACITIES**
- ① 400' OF 2.50" D.J. HOSE
  - ② 1200' OF 5.00" D.J. HOSE
  - ③ 200' OF 1.75" D.J. HOSE
  - ④ 200' OF 2.50" D.J. HOSE

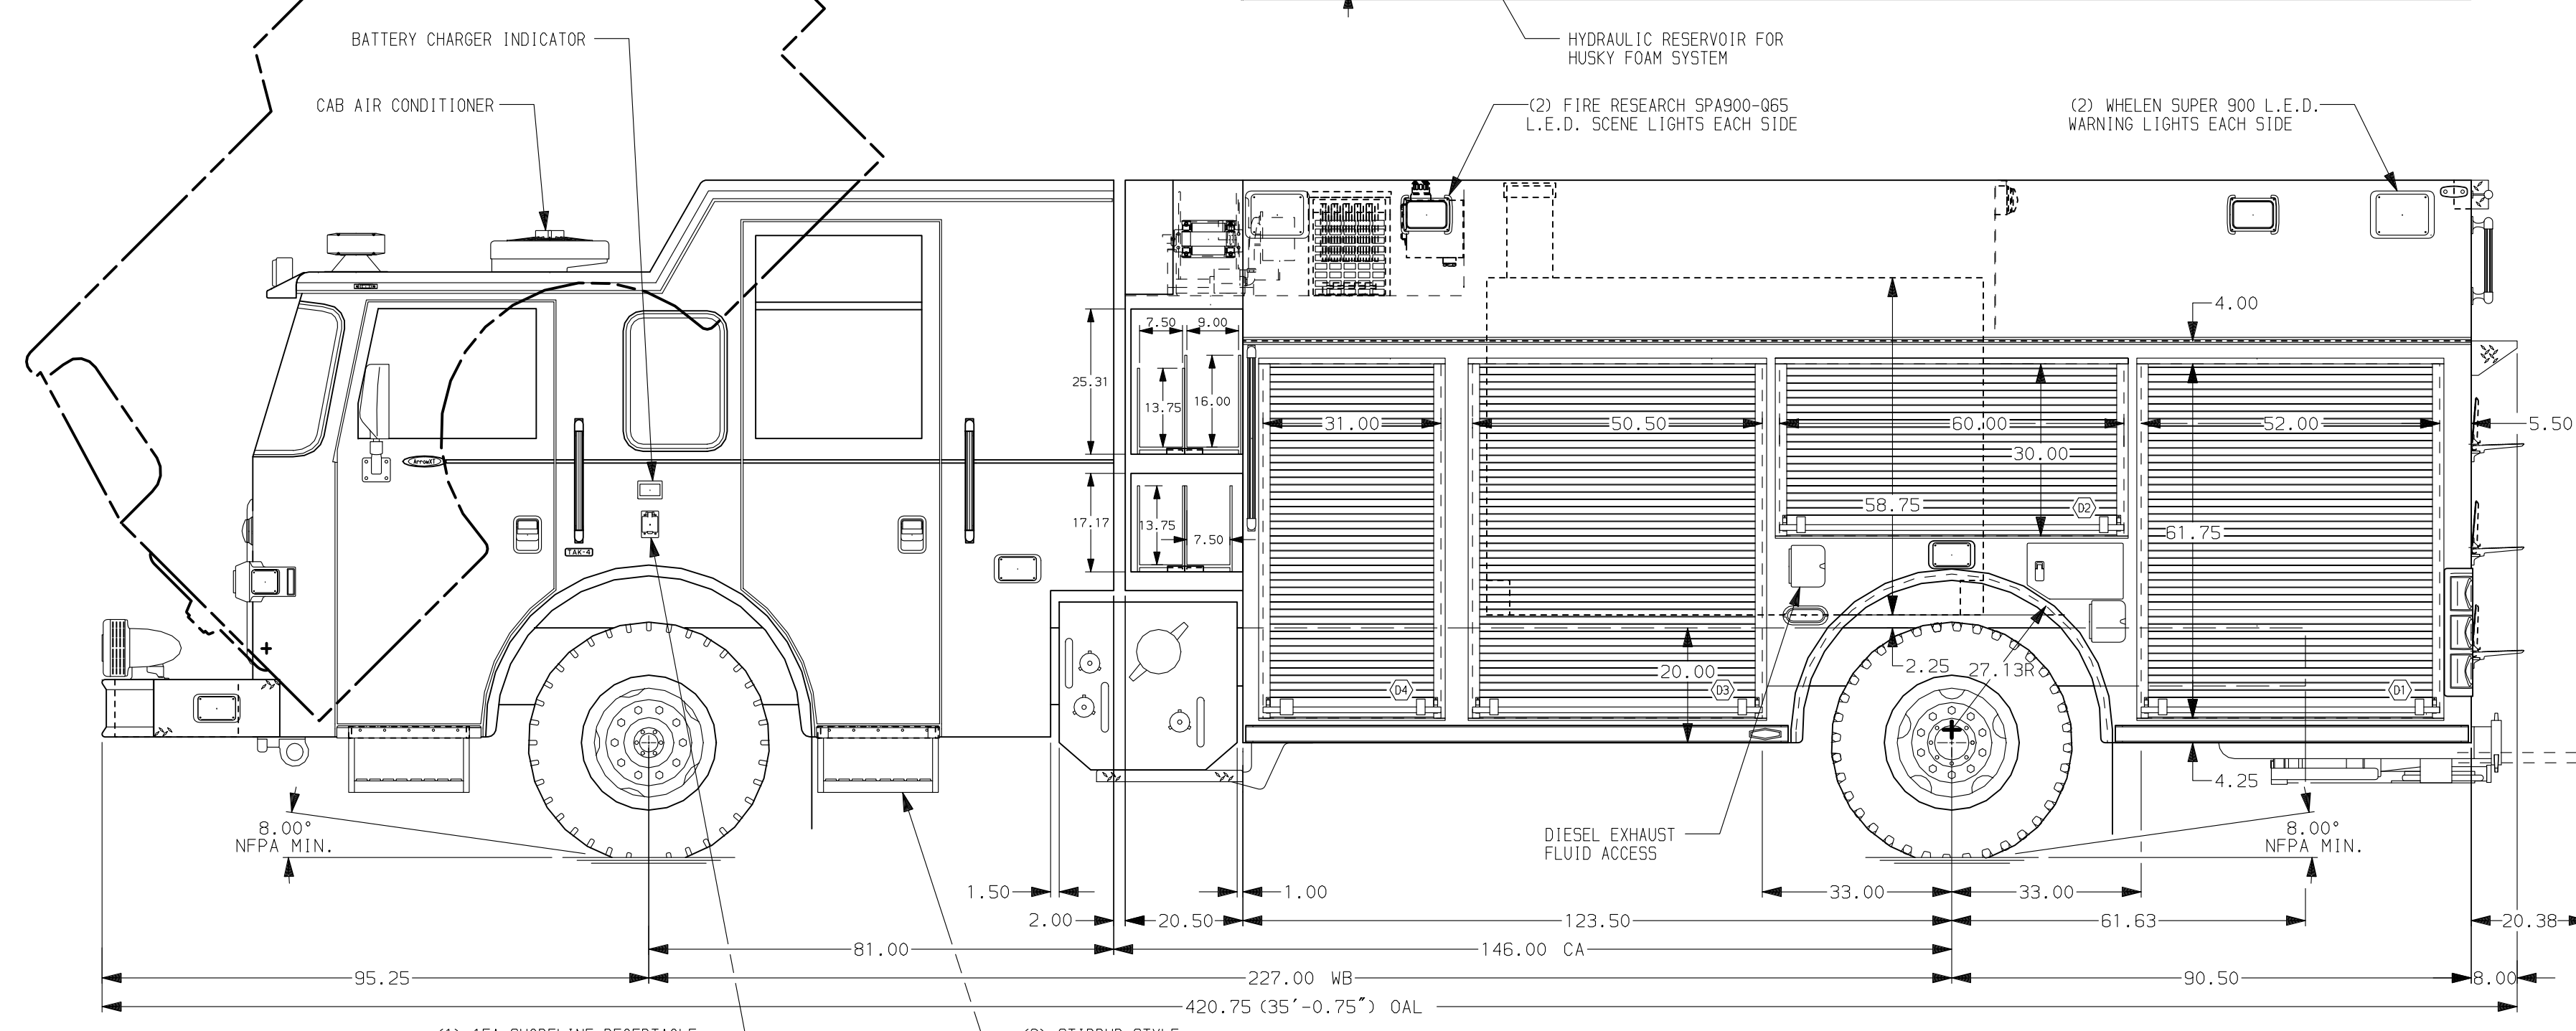

STAINLESS STEEL BODY

FRONT IMPACT PROTECTION

SIDE ROLL PROTECTION

**CUSTOMER APPROVAL**

APPROVED BY: \_\_\_\_\_  
DATE: \_\_\_\_\_



JOB NO. 25204

SCALE 1:24 DATE

REV	DATE	BY	CH	AX8116
1	10NOV11	NPA	DTS	PIERCE
2	07OCT11	NPA	SHA	MODEL

TITLE 1500-D-710P W/40 GAL FOAM CELL, 214" PUC RESCUE (4) XLAYS, LADDERS THRU BODY, DELUGE, GENERATOR

FOR NEWARK FIRE DEPARTMENT NEWARK, NEW YORK

DWG NO. 25204AD

DRAWN BY NPA 05OCT11

CHECKED BY SHA 05OCT11

SHEET SIZE D SHEET NO. 1 OF 1

**NOTE**  
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. 5/STL SCUFFPLATE ON EACH CAB DOOR JAMB
2. MOUNTING BASES FOR ANTENNAS LOCATED PER SHOP ORDER
3. KUSSMAIL PUMP PLUS 1200 BATTERY CHARGER LOCATED IN COMPARTMENT D3
4. PERIMETER SCENE LIGHTS LOCATED PER SHOP ORDER
5. AMOR L.E.D. COMPARTMENT DUAL LIGHT STRIPS LOCATED PER SHOP ORDER
6. ONE VERTICAL PARTITION IN COMPARTMENT D3
7. CIRCUIT BREAKER PANEL IN COMPARTMENT D3
8. SUB FEED BREAKER BOX IN COMPARTMENT D3
9. STAINLESS STEEL FENDER CROWNS FRONT AND REAR
10. PIERCE LOGO MUDFLAPS FRONT AND REAR

11. AIR INLET WITH DISCONNECT COUPLING LOCATED IN DRIVER SIDE STEP WELL
12. COMPARTMENT VENTILATION SYSTEM
13. ONE 6" FNST X 5" STORZ ELBOW AND CAP FOR REAR INLET SHIPPED LOOSE
14. HUSKY 12 SINGLE AGENT FOAM SYSTEM
15. ONE 15A, 120V 6-PLACE SURGE PROTECTED RECEPTACLE STRIP IN EACH EMS COMPARTMENT
16. TWO 15A, 120V DUPLEX RECEPTACLES IN CAB ON ENGINE DOORHOUSE
17. ONE ADJUSTABLE FULL WIDTH/DEPTH SHELF IN COMPARTMENTS D1, D3 & P1; TWO IN P4
18. ONE ADJUSTABLE SLIDE-OUT PEG BOARD TOOLBOARD IN COMPARTMENT D3