


- HOSEBED CAPACITIES**
- ① 500' OF 3.00" D.J. HOSE
  - ② 200' OF 3.00" D.J. HOSE
  - ③ 1200' OF 4.00" NITRILE HOSE
  - ④ 400' OF 1.75" D.J. HOSE

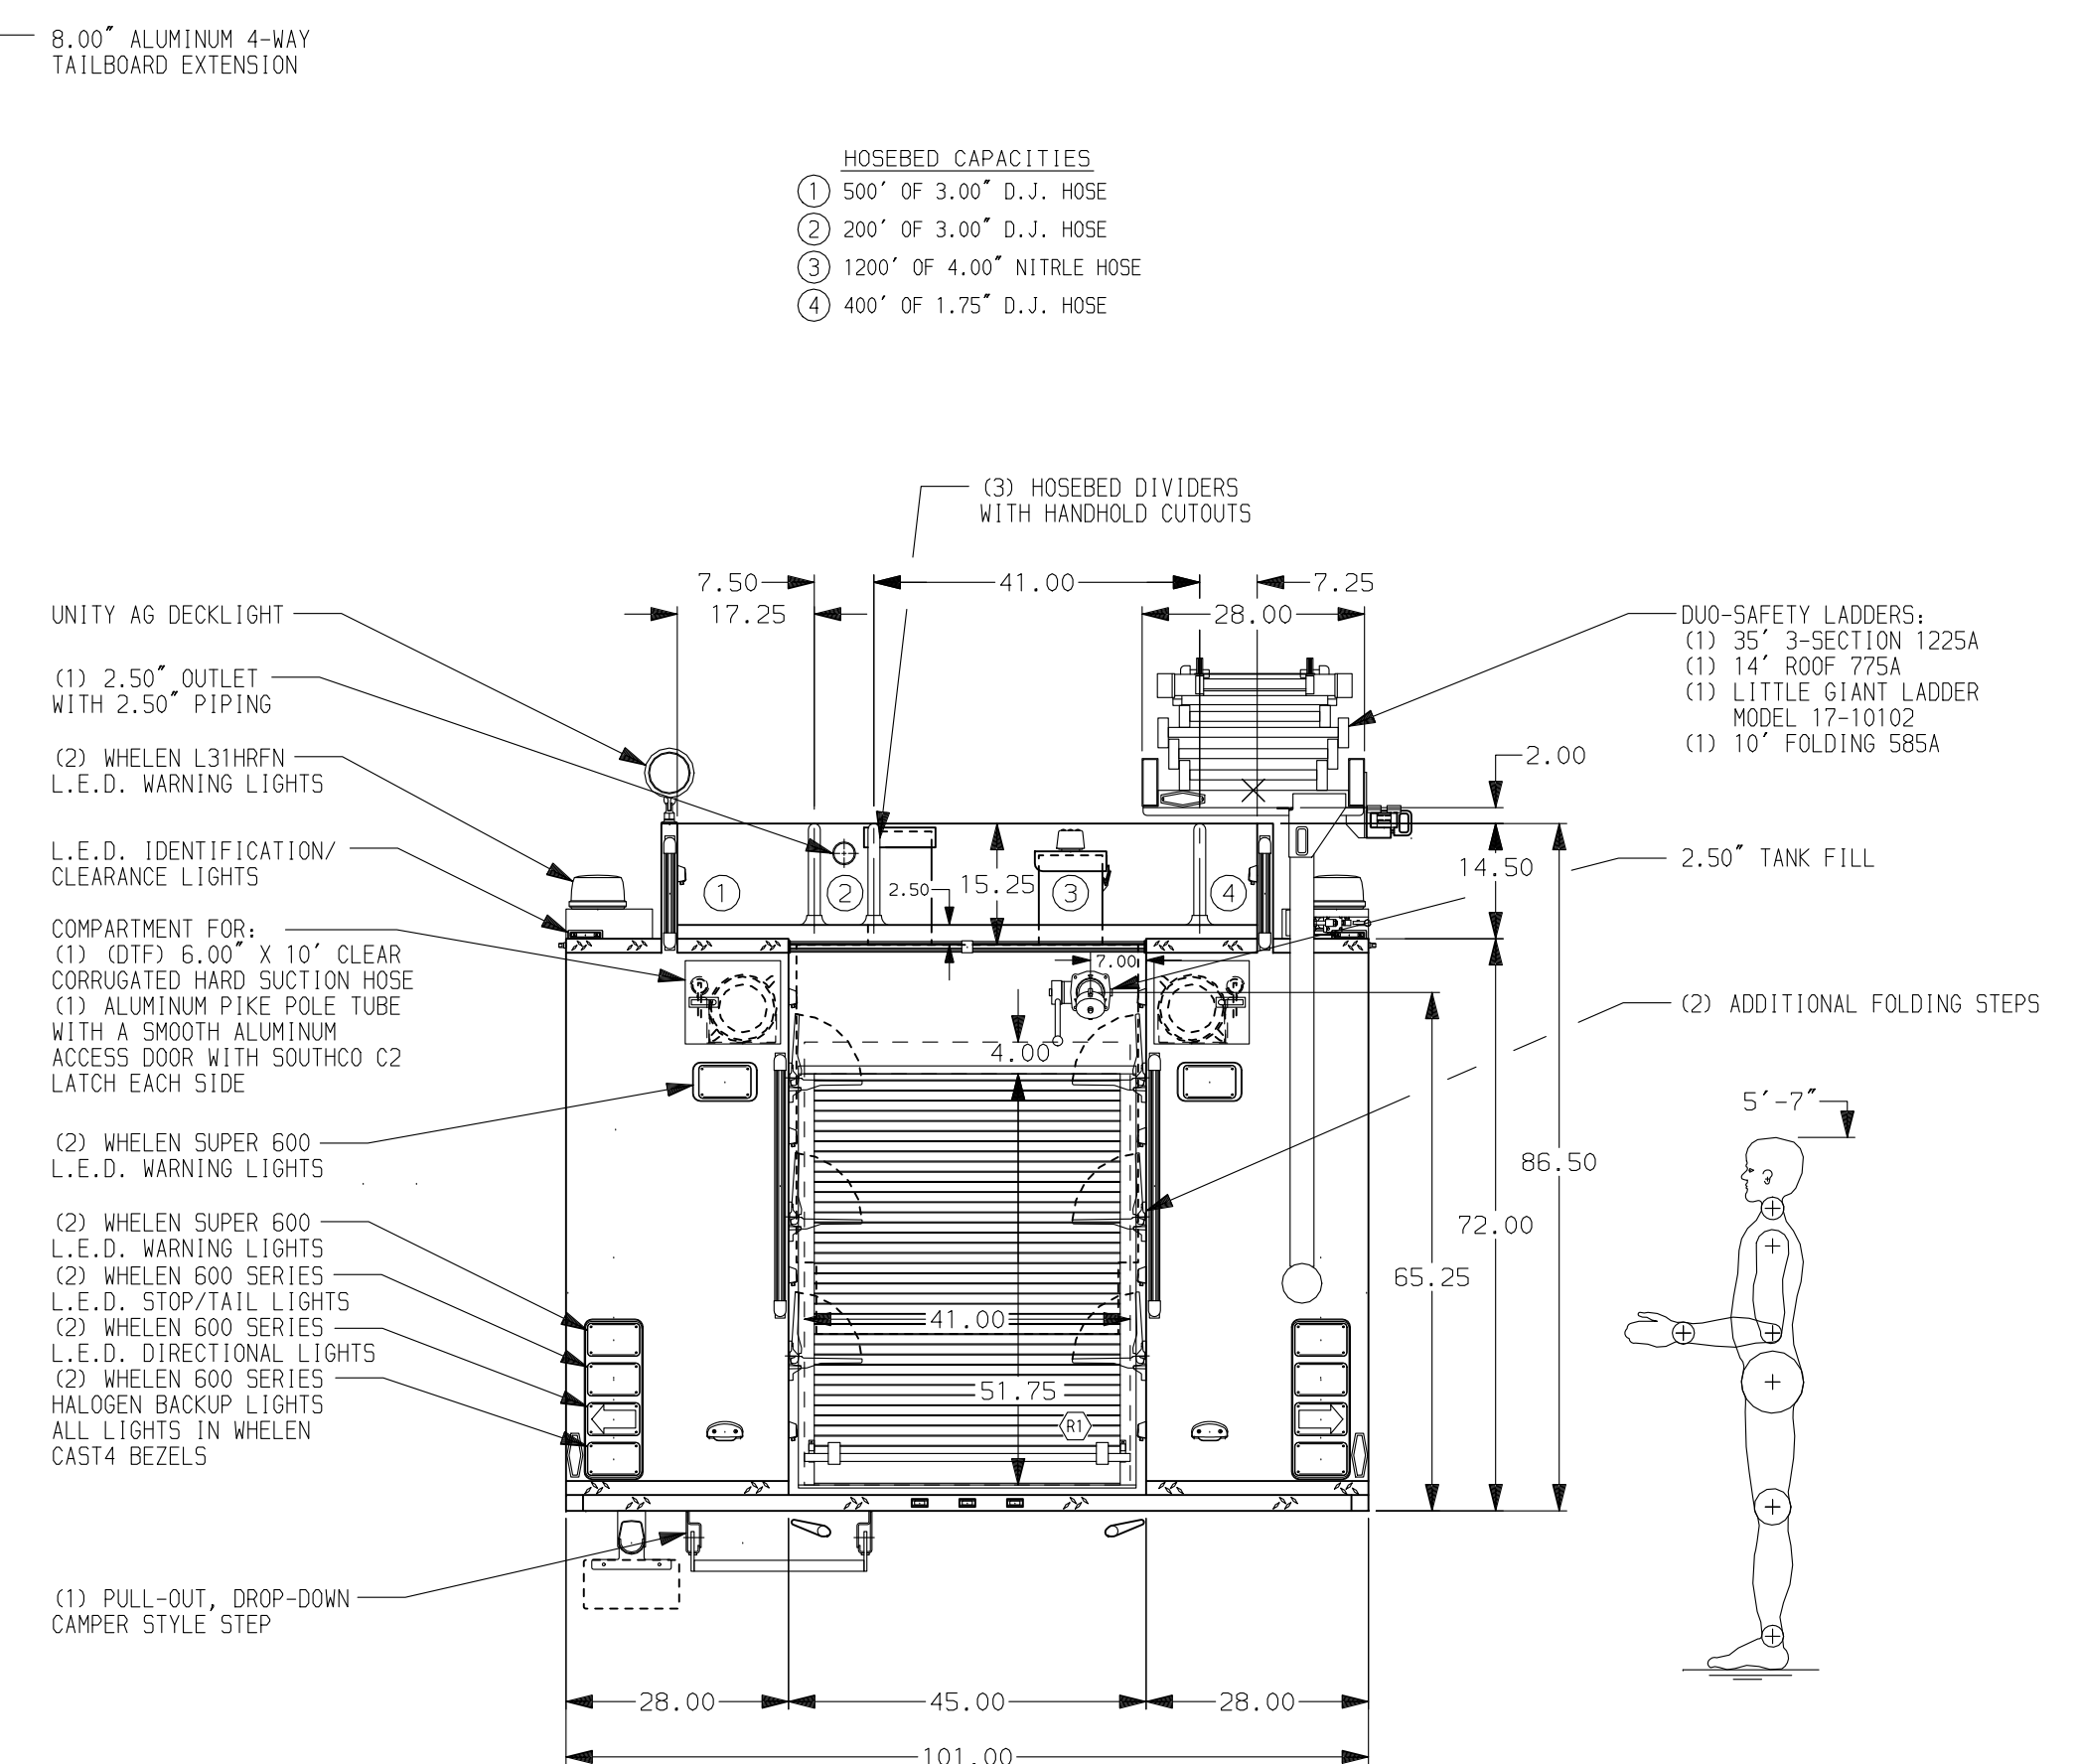

STAINLESS STEEL BODY

SIDE ROLL PROTECTION

**NOTE**  
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. POLISHED S/STL SCUFFPLATE ON EACH CAB DOOR JAMB
2. MOUNTING BASE FOR ANTENNA LOCATED PER SHOP ORDER
3. L.E.D. PERIMETER SCENE LIGHTS LOCATED PER SHOP ORDER
4. AIR INLET LOCATED IN DRIVER SIDE LOWER STEP WELL
5. STAINLESS STEEL FENDER CROWNS FRONT AND REAR
6. PIERCE LOGO MUDFLAPS FRONT AND REAR
7. HUSKY 12 SINGLE AGENT FOAM SYSTEM
8. ONE 15A, 120V DUPLEX RECEPTACLE IN EACH EMS CABINET, TWO IN CAB COMPARTMENT VENTILATION SYSTEM

**CUSTOMER APPROVAL**

APPROVED BY:	
DATE:	
CHASSIS DATA	
MAKE	PIERCE
MODEL	
REV	



TITLE	1250-D-1000P W/30 GAL FOAM CELL, 174" HDRP BODY (3) SPEEDLAYS, HLR, DELUGE, GENERATOR, REEL
FOR	CHURCHVILLE VOLUNTEER FIRE DEPARTMENT CHURCHVILLE, NEW YORK
DWG NO.	22934AD-SH1

JOB NO.	22934
SCALE	1:24
DATE	
DRAWN BY	NPA
CHECKED BY	SHA
SHEET SIZE	D
SHEET NO.	1 OF 2